
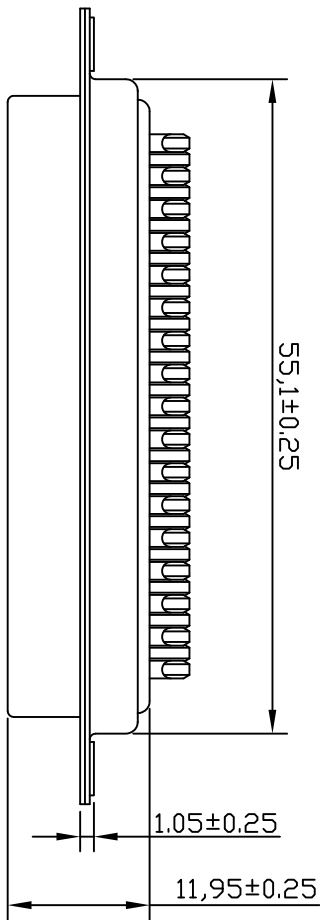


Material & finish
SHELL:
steel
Zinc plated,Tin plated
or Nickel plated steel
PIN CONTACT:
Phosphor bronze or brass
Gold Plated
INSULATOR:
PBT & Glass-fibre reinforced
UL-94-V0
NUMBER OF CONTACT:
09 15 25 37
CURRENT RATING:
3Amp
INSULATOR RESISTANCE:
1000Mn MIN.(at 500V DC)
TEMPERATURE:
-55°C to +105°C

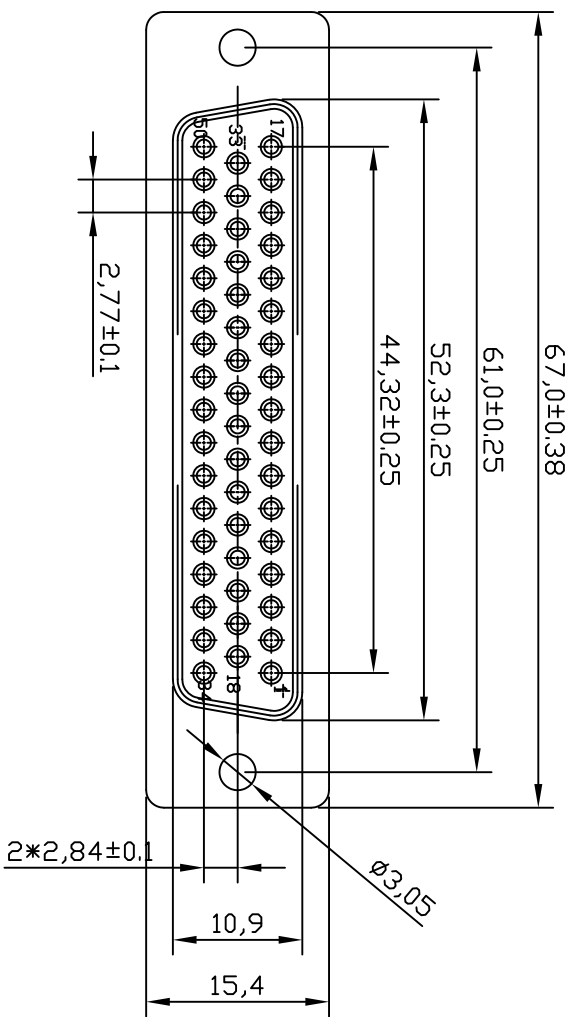

DB-50 S x x x D A 0 0

COLOUR
B:Blue K:Black W:White 2:661C
blue 3:235C Red 4:322C green
6:131CYellow

SHELL PLATING
A:Gold B:Front Gold and back Tin C:Front Nickel and
Back TIN N:Nickel T:Tin 5:Zinc D:CU/ZN/5N

Contact Finish
A:Gold Flash C:Gold Flash3U" D:Gold Flash5U" E:Gold Flash15U"
F:Gold Flash30U" G:Gold T:Tin



东莞扬顺五金电子有限公司
Dong Guan City Yang Shun Hardware Electron Co.,Ltd

未注公差		设计 韩云		品名规格		D-SUB 50PIN 传统母牌线式	
X.	±0,30	审核	Wuyongyan	料号	DB-50SxxxxDx00	型号	D-SUB 50Pin
XX	±0,20	核准		日期	2012.09.05	图号	YS-11-0002
XXX	±0,10	单位	mm	比例	1:1	版次	A/0
XXXX	±0,05						
X° ±2° XX° ±1°							